


BUZZER , 12VDC(9-15 VDC), 90 dBA/30CM!,2800 Hz, Diam. 28 MM

MAGNETIC BUZZER



Material of Case: ABS
Colour: Black
Operating Temperature: -20°C +60°C
Storage Temperature: -30°C +70°C

DIMENSIONS (in mm)

Leadwire Type

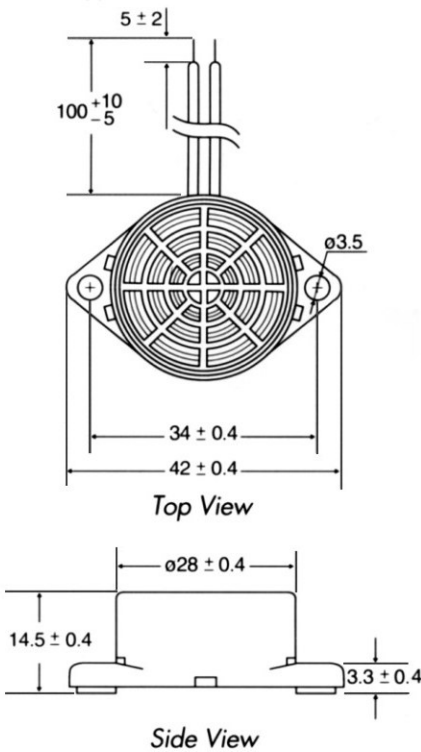

Pin Type

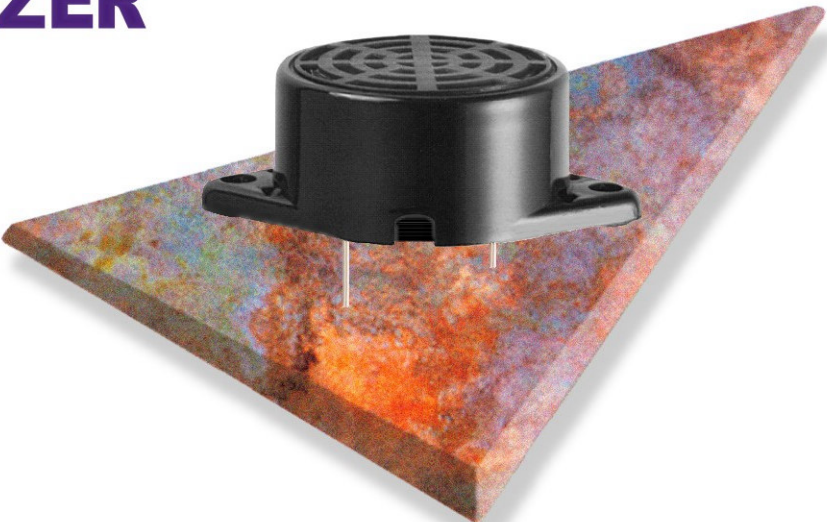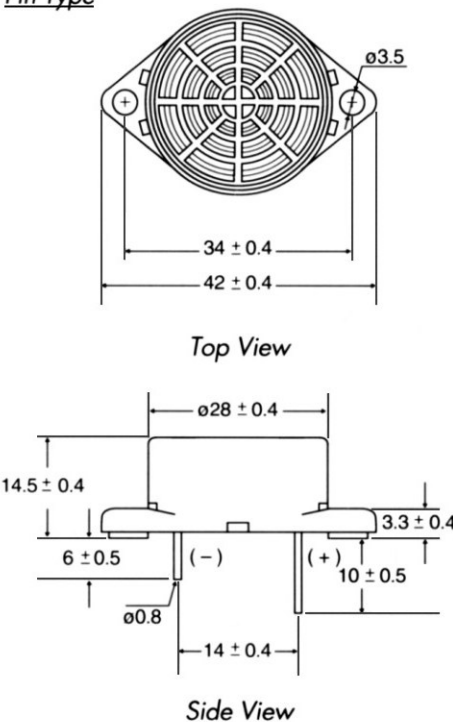

Electrical Specifications

Model No.	1S3030	1S3060	1S3090	1S3120	1S3240	1S3415
Operating Voltage (VDC)	2-5	4-9	6-11	9-15	15-28	4-15
Rated Voltage (VDC)	3	6	9	12	24	12
Max. Current at Rated Voltage (mA)	35	35	40	40	20	15
Frequency (KHz)	2.8±0.2	2.8±0.2	2.8±0.2	2.8±0.2	2.8±0.2	2.8±0.2
Min. Sound Pressure at Rated Voltage (dBA/30cm)	85	85	85	90	90	85
Tone	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Pulse Rate at Rated Voltage (Pulse/Sec)	NIL	NIL	NIL	NIL	NIL	NIL
Terminal	LEAD/PIN	LEAD/PIN	LEAD/PIN	LEAD/PIN	LEAD/PIN	LEAD/PIN

BUZZER , 12VDC(9-15 VDC), 90 dBA/30CM!,2800 Hz, Diam. 28 MM